




Induction Griddle

DIHG70G (old model No. DIHG900)



Specification

Electricity	DIHG70G	220V, 60Hz, 1PH	Power Consumption	DIHG70G	7000 W
	DIHG70G-A	208~240, 50/60Hz, 1PH		DIHG70G-A	6600 W
	DIHG70G-E	220~240, 50/60Hz, 1PH		DIHG70G-E	7000 W
	DIHG60G-J	200V, 50/60Hz, 1PH		DIHG60G-J	6000 W
Power Connection		Plug type (2 separate plugs)	Max Current		30 A
Conversion to Calory		6048 Kcal/h			
Dimension / Weight		900 X 600 X 345 (mm) / 47kg			
Temperature		40 ~ 230°C			
Cooking Zones		2 Cooking Zones	Controller		Knob, Capactive button
Top Material		<input checked="" type="checkbox"/> Top surface : Clad <input checked="" type="checkbox"/> Thickness : 7.5 T			
Recommendation		Pancake, Stir-fry, Fried rice, Vegetable			
Functions & Features		<input checked="" type="checkbox"/> Safety			
		- Over current indication : "E1"			
		- Over voltage indication : "E2" (Above 265V)			
		- Low voltage : "E3" (Below 180V)			
		- Product over heated indication : "E4" (Internal temperature above 85°C)			
		- External thermal sensor absence or damage indication : "E5" (only when using temperature mode)			
- Unstable power indication: "E7"					
- Defective PCB indication : "E8"					
- Defective Working Coil indication : "E9"					
		<input checked="" type="checkbox"/> 2 Separate cooking zones			
		<input checked="" type="checkbox"/> Even / quick-spreaded heating			
		<input checked="" type="checkbox"/> Precise Temperature Control			
		- From 40°C to 230°C adjusted by 5°C / error factor ±2% below			
		<input checked="" type="checkbox"/> Speedy Recovery			
		- When top surface's temperature changes while cooking, it quickly goes back to set temperature			
Warranty		1 year (to be charged in case of user's negligence)			

Seoul Office: #75, Ahasan-ro 78-gil, Gwangjin-gu, Seoul, Republic of Korea 04969 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412


R&D Center: #209, Goraesan-ro, Wabu-eup, Namyangju-si, Gyeonggi-do, Republic of Korea 12202 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

DIPO INDUCTION CO., Ltd. / www.dipoele.com

COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.

Induction Griddle

DIHG70GIR (Steel Top)

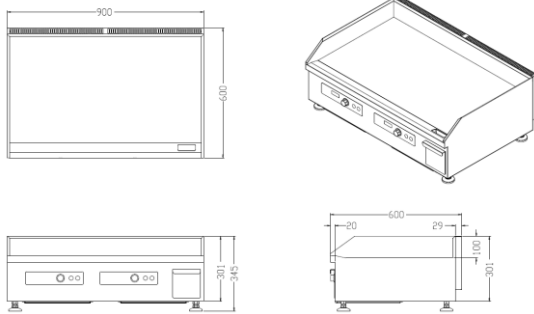

Specification

Electricity	DIHG70GIR	220V, 60Hz, 1PH	Power Consumption	DIHG70GIR	7000 W
	DIHG70GIR-A	208~240, 50/60Hz, 1PH		DIHG70GIR-A	6600 W
	DIHG70GIR-E	220~240, 50/60Hz, 1PH		DIHG70GIR-E	7000 W
	DIHG60GIR-J	200V, 50/60Hz, 1PH		DIHG60GIR-J	6000 W
Power Connection		Plug type (2 separate plugs)	Max Current		30 A
Conversion to Calory		6048 Kcal/h			
Dimension / Weight		900 X 600 X 345 (mm) / 90kg			
Settable Temperature		40 ~ 230°C	Actual Achievable Temperature		40 ~ 260°C
Cooking Zones		2 Cooking Zones	Controller		Knob, Capactive button
Top Material		<input checked="" type="checkbox"/> Top surface : SPHC <input checked="" type="checkbox"/> Thickness : 10.0T			
Recommendation		Steak, Teppanyaki			
Functions & Features		<input checked="" type="checkbox"/> Safety			
		- Over current indication : "E1"			
		- Over voltage indication : "E2" (Above 265V)			
		- Low voltage : "E3" (Below 180V)			
		- Product over heated indication : "E4" (Internal temperature above 85°C)			
		- External thermal sensor absence or damage indication : "E5" (only when using temperature mode)			
- Unstable power indication: "E7"					
- Defective PCB indication : "E8"					
- Defective Working Coil indication : "E9"					
		<input checked="" type="checkbox"/> 2 Separate cooking zones			
		<input checked="" type="checkbox"/> Even / quick-spreaded heating			
		<input checked="" type="checkbox"/> Precise Temperature Control			
		- From 40°C to 230°C adjusted by 5°C / error factor ±2% below			
		<input checked="" type="checkbox"/> Speedy Recovery			
		- When top surface's temperature changes while cooking, it quickly goes back to set temperature			
Warranty		1 year (to be charged in case of user's negligence)			

Seoul Office: #75, Ahasan-ro 78-gil, Gwangjin-gu, Seoul, Republic of Korea 04969 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

R&D Center: #209, Goraesan-ro, Wabu-eup, Namyangju-si, Gyeonggi-do, Republic of Korea 12202 / Tel : +82 2-444-5895 / Fax : +82 70-4694-5412

DIPO INDUCTION CO., Ltd. / www.dipoele.com

COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.