

# NU 100 XSafe

## Self Contained Ice Machine 56 kg

Item #:
Project:
Quantity:



### FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NU 100  
Dice 10 g  
W 22 x D 22 x H 22 mm



NU H 100  
Half Dice 6 g  
W 10 x D 22 x H 28 mm



NU L 100  
Large Dice 15 g  
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R404A  
R452A

### VOLTAGE V/Hz/ph

230/50/1

### INTERNAL BIN CAPACITY

20 kg

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine 56 kg

# NU 100 XSafe

## Self Contained Ice Machine 56 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 56 kg

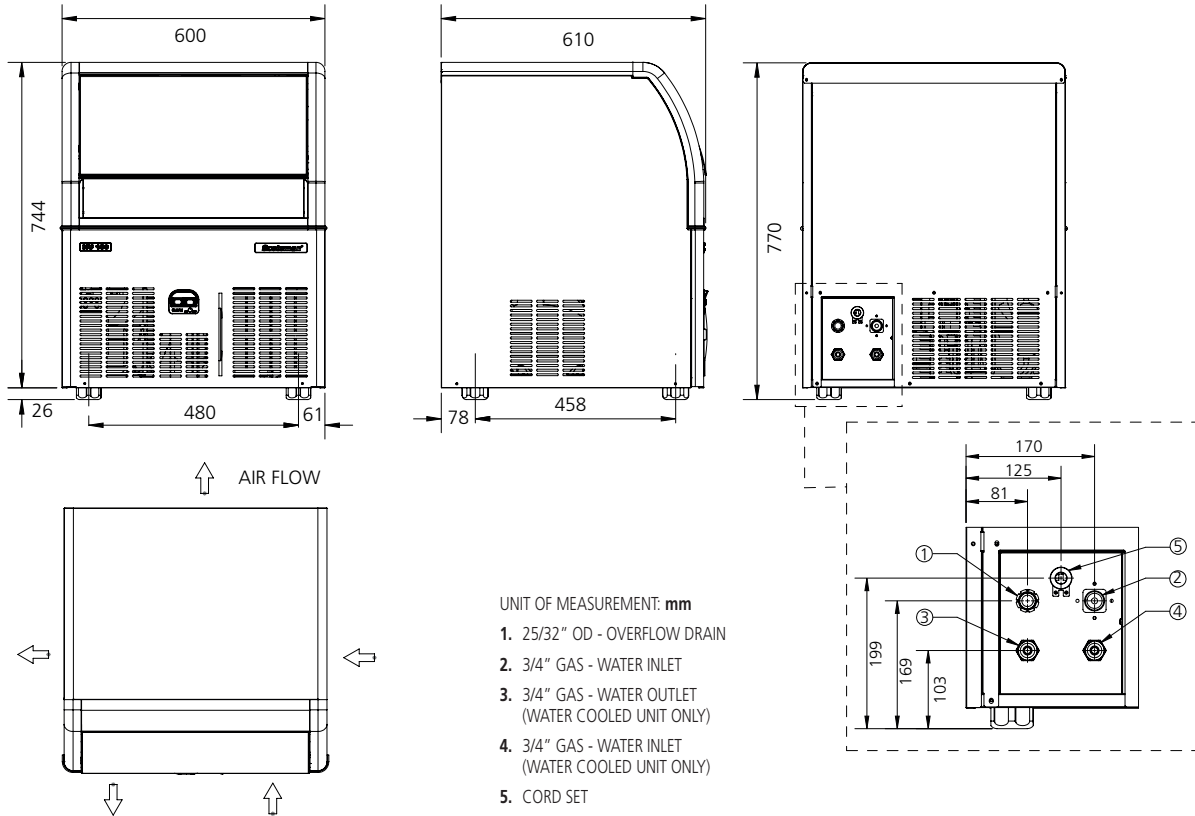

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions									
Size (W x D x H)		600 x 610 x 770 mm		Carton (W x D x H)		670 x 680 x 920 mm							
Net weight		50 kg		Weight		60 kg							
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size		
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm <sup>2</sup>	A		
NUH 100 AS	230/50/1	56	45	32	27.8	8.9	3.5	450	780	3 x 1.5	10		
NUH 100 WS	230/50/1	56	45	32	27.8	8.9	26.4	450	780	3 x 1.5	10		
NUL 100 AS	230/50/1	60	50	40	27.8	11.1	4.4	450	780	3 x 1.5	10		
NUL 100 WS	230/50/1	60	50	40	27.8	11.1	33.1	450	780	3 x 1.5	10		
NU 100 AS	230/50/1	56	45	32	27.8	8.9	3.5	450	780	3 x 1.5	10		
NU 100 WS	230/50/1	56	45	32	27.8	8.9	26.4	450	780	3 x 1.5	10		